




FC CE
IC TELECOM

LEVEL-PLANE 16B



Android App

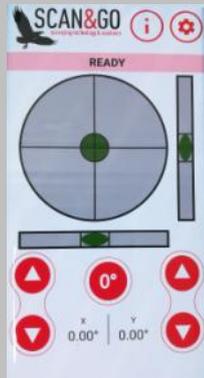

www.scan-go.eu

DATA SHEET

July 2019

SCAN&GO srl
Via della Tecnica 34 A/B - 41051
Castelnuovo Rangone (MO) - Italy
Cell. +39 3924627285
info@scan-go.eu

Static multi-axis leveling platform with Bluetooth and cable control for 3D Laser Scanner or Robotic Total Stations



Level-Plane 16B is a static multi-axis platform created for automatic (non dynamic) leveling to ensure total verticality of the equipment with accuracy of +/- 30" (or +/-3" with manual control) **in all vehicle inclination conditions.**

The structure is made of anodized aluminum, externally with a PVC cover to protect the mechanical and electrical parts from severe weather conditions and dust, removable to ensure internal inspections - IP65.

The top is made of stainless steel, specially designed for topographic tribrach with standard 5/8".

Powered by cable connection to the car-lighter-12 V - 5 A. (it's also possible to use autonomous power source, with 12V battery available as accessory)


The Leveler is equipped with Cable controller, backlit display and keyboard, made of shockproof material resistant to dust and moisture - IP65.

The control of LP16B is possible through an APP, which can be installed on Android.

it's also possible a standard connection by cable.

TECHNICAL DATA

- | | |
|--|--------------------------------|
| • Accuracy with manual leveling | +/- 3" |
| • Accuracy with automatic leveling | +/- 30" |
| • Weight | 11 kg |
| • Maximum load | 35 kg |
| • External dimensions | 30x30xh 30 cm |
| • Temperature limit during the use of the equipment | - 15° C + 50° C |
| | ARCTIC VERSION - 40° C + 50° C |
| • Storage temperature limit | - 30° C + 50° C |
| | ARCTIC VERSION - 50° C + 50° C |
| • Power supply | 12V |
| • Maximum operating limit shooting ground slope along the longitudinal axis of the vehicle - AXIS L | +/- 15° |
| • Maximum operating limit shooting ground slope along the perpendicular axis of the vehicle - AXIS T | +/- 22° |




POWER SUPPLY AND CONTROL SYSTEM

The power source of the platform is supplied by a cable connected to the vehicle "car lighter" -12 V - 5 A vehicle. It's also possible to use autonomously power source with 12V battery, available as accessory.



The Leveler is equipped with a Cable controller and mounting kit.

The display shows with a numerical hundredths degrees the inclination of the platform on both longitudinal and transversal axes.



Simply press a button, the system proceeds automatically reaching the horizontal position on both axes.



BEFORE



AFTER



Once leveled the Level-Plane 16B remains firm in the same position till you press the button again before next scan session.

Configurations

Level - Plane 16 Bluetooth (and Cable controller)

Static multi-axis leveling platform with Bluetooth and cable control for Laser Scanner or Robotic Total Stations

Composed of

LP16R	Level-Plane 16 Bluetooth
UC16	LP16 Cable Controller
CUC	Cable for Controller UCR16
STA	Roof bar brackets
CPC	Power Cable with connection to the car-lighter
BMT	Soft bag for Level-Plane 16R
BMA	Soft Bag for accessories
TRL	Trilock - Topographic tribach

Android App for Phone or Tablet

- Temperature limit during the use of the equipment - 15° C + 50° C
- Storage temperature limit - 30° C + 50° C



Level - Plane 16 Bluetooth - ARCTIC (version)

Static multi-axis leveling platform with Bluetooth and cable control for Laser Scanner or Robotic Total Stations - low temperatures

Composed of

LP16R-A	Level-Plane 16 Bluetooth Arctic
UC16	LP16 Cable Controller
CUC	Cable for Controller UCR16
STA	Roof bar brackets
CPC	Power Cable with connection to the car-lighter
BMT	Soft bag for Level-Plane 16R Arctic
BMA	Soft Bag for accessories
TRL	Trilock - Topographic tribach

Android App for Phone or Tablet

Level-Plane 16 Radio Arctic is designed to be used at very low temperatures.

- Temperature limit during the use of the equipment -30° C + 50° C
- Storage temperature limit - 50° C + 50° C



**Level-Plane 16B
can be used with any 3D
Laser Scanner brand !**